

Specification

HPLC Pump

Model	PU-4580
Flow rate setting range	0.001 - 10.0 mL/min (0.001 mL/min step)
Flow rate accuracy	±1% or ±2 µL/min, which is larger. (0.5 - 10.0 mL/min)
Flow rate precision	0.05% RSD or ±0.04 min SD, which is larger. (0.5 - 5.0 mL/min)
Maximum pressure	50 MPa (- 6.0 mL/min) 35 MPa (- 10.0 mL/min)
Dimensions, Weight	150(W) x 470(D) x 150(H) mm, Approx. 11 kg
Power requirement	AC100 - 240 V, 50/60 Hz, 65 VA

Autosampler

Model	AS-4550
Sample injection method	Full or partially fill loop injection (zero sample loss available)
Injection volume	0.1 - 200 µL (0.1 µL step, 1 µL step (100 µL -))
Sample loop	100 µL (standard)
Number of samples	50 (standard, 2.0 mL vial)
Maximum usable pressure	35 MPa
Dimensions, Weight	150(W) x 470(D) x 386(H) mm, Approx. 14 kg (without temperature control unit), Approx. 15 kg (with temperature control unit)
Power requirement	AC100 - 240 V, 50/60 Hz, 40 VA (without temperature control unit), 110 VA (with temperature control unit)

UV-Visible Detector

Model	UV-4570
Light source	D ₂ lamp, Wl lamp
Wavelength range	190 - 900 nm
Noise level	±0.3 × 10 ⁻⁵ AU
Drift	1.5 × 10 ⁻⁴ AU/h
Dimensions, Weight	150(W) x 470(D) x 150(H) mm, Approx. 9 kg
Power requirement	AC100 - 240 V, 50/60 Hz, 160 VA

JASCO INTERNATIONAL CO., LTD.

11-10, Myojin-cho 1-chome, Hachioji, Tokyo 192-0046, Japan
 Tel: +81-42-649-3247 Fax: +81-42-649-3518 <http://www.jascoint.co.jp/english/>
 Australia, China, Hong Kong, India, Indonesia, Korea, Malaysia, New Zealand,
 Pakistan, Philippines, Russia, Singapore, Taiwan, Thailand

JASCO INCORPORATED

28600 Mary's Court, Easton, MD 21601, U.S.A.
 Tel: +1-800-333-5272 +1-410-822-1220 Fax: +1-410-822-7526 <http://www.jascoinc.com>
 U.S.A., Canada, Costa Rica, Mexico, Puerto Rico, Argentina, Brazil, Chile, Colombia, Paraguay,
 Peru, Uruguay, Guatemala, Ecuador, Bolivia

JASCO EUROPE s.r.l.

Via Luigi Cadorna 1, 23894 Cremella (Lc), Italy
 Tel: +39-039-9215811 Fax: +39-039-9215835 <http://www.jasco-europe.com>

JASCO Deutschland www.jasco.de, JASCO UK www.jasco.co.uk,

JASCO France www.jascofrance.fr, JASCO Benelux www.jasco.nl,

JASCO Spain www.jasco-spain.com

Italy, Germany, U.K., France, Netherlands, Belgium, Luxembourg, Spain, Sweden, Norway, Denmark,
 Austria, Finland, Greece, Hungary, Poland, Portugal, Romania, Switzerland, Algeria, Cyprus,
 Egypt, Israel, Jordan, Kuwait, Lebanon, Morocco, Saudi Arabia, South Africa, Tunisia,
 Turkey, U.A.E., Yemen

JJAR-1705 Printed in Japan

For more information, please contact :



Products described herein are
 designed and manufactured by
 ISO-certified JASCO Corporation.

MADE IN TOKYO, JAPAN

Compact HPLC System

LC-4500 model




Performance
 Innovation
 Reliability

LC-4500 model

New compact module

Compact

LC-4500 compact module (width: 15 cm) makes effective use of lab space.

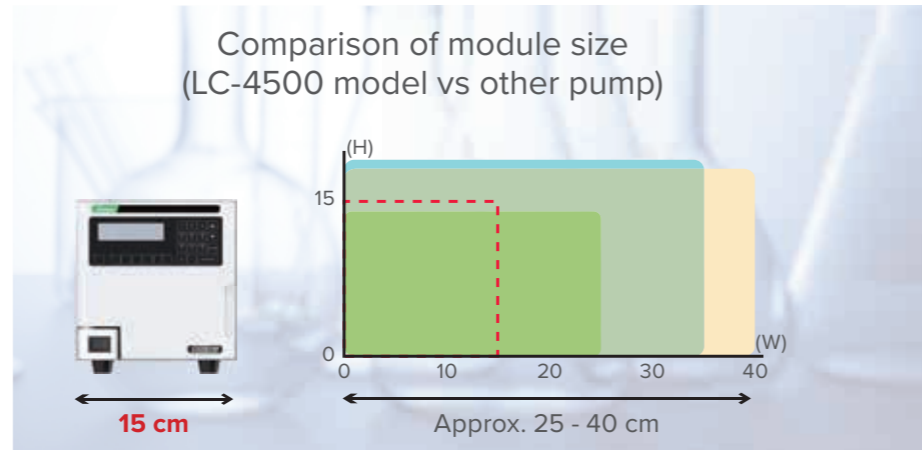

PU-UV system is the minimum basic system.

Autosampling system has the capability for high-throughput measurement.

Autosampling system with high pressure gradient has the capability for high-throughput measurement, and can perform the advanced HPLC analysis.

Flexible

PU-4580 enables to configure the various solvent delivery system, and AS-4550 can provide the various sample injection method. Therefore, these modules achieve to build the ideal system.

Combination with existing LC-4000 modules can provides wider application.

User Friendly

LC-4500 model has the key panel, which achieves simple operation.

Key panel (HPLC pump)

Setting examples of key panel (Solvent delivery pump)

- Flow rate
- Start/stop timer
- Gradient program
- Flow rate time program
- Max/min Pressure

HPLC Pump / PU-4580

- Solvent delivery pump for conventional analysis
- Various optional unit for PU-4580
- Simple maintenance (front access).



HPLC Pump options

DG-4580

Degassing Unit



Up to 4-solvents
(The expansion to 5-solvents is available.)

LG-4580

Low Pressure Gradient Unit



Up to 4-solvents

MX-4580-D

Dynamic Mixing Unit



Up to 3-solvents

LV-4580-02

Manual 2-Solvent Switching Valve Unit (without the valve unit panel)

Autosampler / AS-4550

- Various sample injection methods are available. (dilution, pre-column derivatization)
- High capability of setting the various sample vials by using optional sample rack.
- Temperature control of sample by using temperature control unit (4 -40 degree C: optional).

- Optional sample rack
- for Eppendorf tube
 - for 300 μ L vial
 - for 600 μ L vial
 - for 96-well microplate



UV-Vis Detector / UV-4570

- UV-4570 can measure from UV region to Visible region (190 - 900 nm)
- Various options for UV-4570 such as the micro cell unit.
- Useful on-flow spectrum measurement.



Other modules

BS-4500 Bottle Stand



- Number of bottle
- Up to 5 (500 mL bottle)
 - Up to 4 (1 L bottle)

* Please note that BS-4500 does not include the bottle.

7725i Manual injector



- Sample loop
- 20 μ L (standard)
 - The loop capacity can be changed as option.

* Please note that 7725i does not include the injector panel.